

Technical data sheet

UTC3 W with 3 protective contact sockets, white

Item number: 7404611



The ready-for-connection UTC3 universal support possesses 3 pre-installed 33° protective contact sockets in white of 16 A. Suitable for VL connection cables and device installation units of nominal size 2, 4, R4, 6 and R7.

PVC connection cable with connector, 3-pin, type WINSTA® MIDI.
The ready-for-connection UTC3 universal support has 3 pre-installed 33° protective contact sockets in white with 16 A.

PVC connection cable with connector, 3-pin, type WINSTA® MIDI



PA Polyamide

Master data

| | |
|---------------------|--------------------------------|
| Item number | 7404611 |
| Type | UTC3 W W3 |
| Description 1 | Universal supportConnectWINSTA |
| Description 2 | VDE, triple white |
| Manufacturer | OBO |
| Dimension | 165x76x45 |
| Material | Polyamide |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 29.9 kg |
| Weight unit | kg/100 pc. |


Technical data sheet

UTC3 W with 3 protective contact sockets, white

Item number: 7404611



Dimensions

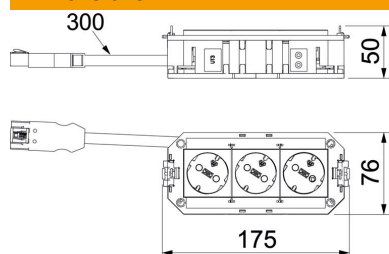

| | |
|--------|--------|
| Length | 175 mm |
| Width | 76 mm |
| Height | 60 mm |

Technical data

| | |
|--|---------------------|
| Connection cable, halogen-free | yes |
| Number of installable devices | 3 |
| Version for | Triple pure white |
| Cable length | 300 mm |
| Line cross-section | 2.5 mm ² |
| Plug-in system | WINSTA®MIDI |
| Plug connector system, system-specific | yes |
| Circuit | 1 |
| System length | 165 mm |
| Surge protection | no |